

EIGHT-SPOKE



Rim sizes available: 12x4JA, 13x4.5JJ, 14x5.5JJ, 15x5JJ, 15x6JJ, 16x6K and 16.5x6.75. Standard colors available: Bright White, Black, Silver, Silver Sparkle.

PART NO.	RIM SIZE	BOLT CIRCLE	PILOT DIA.	OFFSET	CAPACITY & PSI
017-213-XX	12x4JA	4-4.00	2.84	0	1045@90psi
017-214-XX	12x4JA	5-4.50	3.19	0	1045@90psi
017-201-XX	13x4.5JJ	4-4.00	2.65	0	1100@50psi
017-189-XX	13x4.5JJ	5-4.50	3.19	0	1660@65psi
017-142-XX	14x5.5JJ	5-4.50	3.19	0	1865@50psi
017-143-XX	15x5JJ	5-4.50	3.19	0	1820@50psi
017-149-XX	15x6JJ	5-4.50	3.19	0	2050@75psi
017-144-XX	15x6JJ	6-5.50	4.27	0	2600@75psi
017-243-XX	16x6K	6-5.50	4.27	0	3040@80psi
017-162-XX#	16x6K	8-6.50	4.90	0	3750@110psi
017-244-XX	16.5x6.75	6-5.50	4.27	0	3040@80psi
017-163-XX†	16.5x6.75	8-6.50	4.90	0	3530@90psi

XX – 14 Bright White; – 43 Silver Sparkle; – 60 Silver; – 65 Black-12 Bright White with Red/Blue Printed Stripes


Stud Size for all except where noted: 1/2"-20

Fasteners: 60° cone nut

†Stud size: 1/2"-20 / 9/16"-18

#Stud size 9/16"-18

MINI-MOD

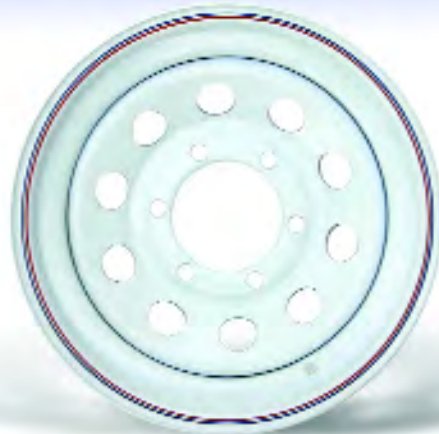

Rim sizes available: 12x4JA, 13x4.5JJ, 14x5.5JJ, 15x5JJ, 15x6JJ, 16x6K and 16.5x6.75. Standard colors available: Bright White, Black, Silver, Silver Sparkle.

PART NO.	RIM SIZE	BOLT CIRCLE	PILOT DIA.	OFFSET	CAPACITY & PSI
017-227-XX	12x4JA	4-4.00	2.84	0	1045@90psi
017-228-XX	12x4JA	5-4.50	3.19	0	1045@90psi
017-229-XX	13x4.5JJ	5-4.50	3.19	0	1660@65psi
017-230-XX	14x5.5JJ	5-4.50	3.19	0	1865@50psi
017-231-XX	15x5JJ	5-4.50	3.19	0	1820@50psi
017-232-XX	15x6JJ	5-4.50	3.19	0	2050@75psi
017-233-XX	15x6JJ	6-5.50	4.27	0	2600@75psi
017-255-XX	16x6K	6-5.50	4.27	0	3040@80psi
017-281-XX#	16x6K	8-6.50	4.90	.50 In	3750@110psi
017-293-XX#	16x6K	8-6.50	4.90	0	3750@110psi
017-257-XX	16.5x6.75	6-5.50	4.27	0	3040@80psi
017-280-XX†	16.5x6.75	8-6.50	4.90	.50 In	3530@90psi
017-296-XX†	16.5x6.75	8-6.50	4.90	0	3530@90psi

XX – 14 Bright White; – 43 Silver Sparkle; – 60 Silver; – 65 Black-12 Bright White with Red/Blue Printed Stripes

Stud Size for all except where noted: 1/2"-20

Fasteners: 60° cone nut

†Stud size: 1/2"-20 / 9/16"-18

#Stud size: 9/16"-18

DIRECTIONAL



Rim sizes available: 13x4.5JJ, 14x5.5JJ, 15x5JJ, 15x6JJ. Standard colors available: Bright White, Sterling Silver.

TRI-OVAL



Rim sizes available: 15x5JJ, 15x6JJ, 16x6K. Standard colors available: Bright White, Black, Silver, Silver Sparkle.

With Rivets

PART NO.	RIM SIZE	BOLT CIRCLE	PILOT DIA.	OFFSET	CAPACITY & PSI
017-323-XX	13x4.5JJ	5-4.50	3.19	0	1360@50psi
017-324-XX	14x5.5JJ	5-4.50	3.19	0	1870@50psi
017-325-XX	15x5JJ	5-4.50	3.19	0	1820@50psi
017-326-XX	15x6JJ	6-5.50	4.27	0	2600@75psi

XX – 14 Bright White; –12 Bright White with Red/Blue Printed Stripes; – 2B Sterling Silver; – 65 Black Stud Size 1/2"-20 Fasteners: 60° cone nuts

No Rivets

017-318-XX	13x4.5JJ	5-4.50	3.19	0	1360@50psi
017-319-XX	14x5.5JJ	5-4.50	3.19	0	1870@50psi
017-320-XX	15x5JJ	5-4.50	3.19	0	1820@50psi
017-321-XX	15x6JJ	6-5.50	4.27	0	2600@75psi

XX – 14 Bright White; –12 Bright White with Red/Blue Printed Stripes; – 2B Sterling Silver; – 65 Black Stud Size 1/2"-20 Fasteners: 60° cone nuts

DEMOUNTABLE RIMS

PART NO.	RIM SIZE	CAPACITY & PSI
017-032-20~	14.5x6.00 MH	3100@100psi
017-053-20~	14.5x6.00 MH	3100@100psi

~Stud Size: Manufactured Housing transport is 1/2"-13 MH hub and are attached using rim clamps and 1/2"-13 hex head wheel screws. For utility application 9/16"-18 UT hub and are attached using rim clamps 9/16"-18 studs and hex nuts.

PART NO.	RIM SIZE	BOLT CIRCLE	PILOT DIA.	OFFSET	CAPACITY & PSI
017-347-XX	15x5JJ	5-4.50	3.19	0	1820@50psi
017-345-XX	15x6JJ	5-4.50	3.19	0	2050@65psi
017-348-XX	15x6JJ	6-5.50	4.27	0	2600@75psi
017-343-XX#	16x6K	8-6.50	4.9	0	3750@110psi

XX – 14 Bright White; – 43 Silver Sparkle; -60 Silver; – 65 Black-12 Bright White with Red/Blue Printed Stripes Stud Size 1/2"-20 Fasteners: 60° cone nuts #9/16"-18 Fasteners: 60° cone nuts

SPECIALS

PART NO.	RIM SIZE	BOLT CIRCLE	PILOT DIA.	OFFSET	CAPACITY & PSI
017-107-25§	16.5x9.75	8-6.50	4.78	.50 In	4000@75psi
017-215-25§	16.5x9.75	8-6.50	4.78	.30 Out	4000@75psi
017-240-25	17.5x6.75HC	8-6.50	4.75	.31 Out	4805@125psi
017-241-25	17.5x6.75HC	8-6.50	4.75	.19 In	4805@125psi
017-298-25	17.5x6.75HC	8-6.50	4.75	.50 Out	6000@125psi

Stud Size: 5/8"-18 Fasteners: hub piloted wheel – use flange nuts or clamp ring with 90° cone nuts

§Fastener: 90° cone nut

CONVENTIONAL




Rim sizes available: 13x4.5JJ, 14x5.5JJ, 15x5JJ, 15x6JJ, 16x6K and 16.5x6.75.
Standard color available: Gray.

PART NO.	RIM SIZE	BOLT CIRCLE	PILOT DIA.	OFFSET	CAPACITY & PSI
017-078-25	13x4.5JJ	5-4.50	2.62	.50 In	1480@50psi
017-114-25	14x5.5JJ	5-4.50	2.62	.50 In	1865@50psi
017-115-25	15x5JJ	5-4.50	2.62	.50 In	1820@50psi
017-117-25	15x6JJ	5-4.50	2.62	.50 In	1820@75psi
017-118-25	15x6JJ	6-5.50	3.65	0	2600@75psi
017-235-25	16x6K	6-5.50	3.65	0	3040@80psi
017-153-25#	16x6K	8-6.50	4.89	0	3750@110psi
017-236-25	16.5x6.75	6-5.50	3.65	0	3040@80psi
017-154-25	16.5x6.75	8-6.50	4.89	.50 In	3530@90psi

Stud Size for all except where noted: 1/2"-20 Fasteners: 60° cone nuts†Stud size: 1/2"-20 / 9/16"-18 #Stud size: 9/16"-18

DUALS

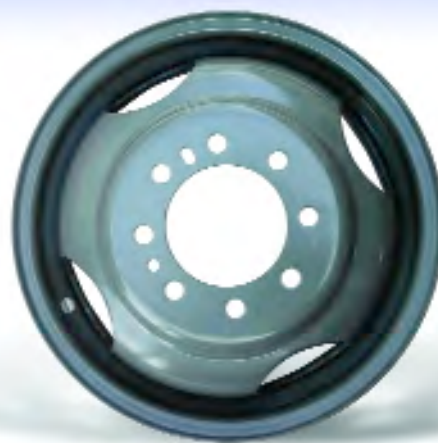

Rim sizes available: 14.5x7.00 MH, 16x6K, 16.5x6.75 and 17.5x6.75 HC. Standard color available: Gray.

PART NO.	RIM SIZE	BOLT CIRCLE	PILOT DIA.	OFFSET	CAPACITY & PSI
017-186-25	14.5x7MH	8-6.50	4.75	5.65 Out	3000@100psi
017-279-25	16x6K	8-6.50	4.75	5.50 Out	3000@110psi
017-157-25	16.5x6.75	8-6.50	4.75	5.50 Out	3000@80psi

Stud Size for all except where noted: 5/8"-18 Fasteners: hub piloted wheel – use flange nuts or clamp ring with 90° cone nuts

Tradition of Excellence!

